

Element

UUR

KENDA

SHIMANO

SUNTOUR



PARTS

SPECIFICATION


FRAME	ELEMENT 29" H44 D55, 15.5", H/T 100mm D57X1.8T, 44X1.8T, 57X1.8, 22X1.6T
FORK	ELEMENT ALLOY SHOULDER ALLOY LEGS, 29" AIR SUSPENSION REMOTE LOCKOUT, 28.6X170mm, ED32mm, 38mm, PITCH 100mm
HEADSET	ELEMENT D13 44X55X28.6X15HX25H
ALLOYWAHER	FEIMIN 28.6X5mm
HANDLEBAR	UUR HB-105BT 31.8X22.2X2.0TX760mm
STEM	UUR AS-261C 60mmX28.6X31.8
SEATPOST	UUR SP-609 30.4X350MM
SEATPIN	UUR YX-049 34.9mm BK WITH QR
GRIP	JD-201 TPR 22.2X130mm
BB SHELL	N/A
CHAINWHEEL	CHARM-34T ALLOY LEGS 32TX170mm
CHAIN	PYC P12 INDEX 12S 1/2 3/32 L118
PEDAL	ELEMENT FP-922 9/16
BRAKE LEVER	N/A
FRONT BRAKE	SHIMANO MT200 HYDRAULIC LEFT FOR FRONT F: 800mm
REAR BRAKE	SHIMANO MT200 HYDRAULIC RIGHT FOR RIGHT R: 1500mm
ROTOR	160mmX2PCS
RIMS	HL-28D 29X1.75X32HX14GXH20mm A/V
SPOKES	45# 14G 64PCS F/R:285/287mm
TIRE	KENDA K1127A 29X2.20 60TPI
INNER TUBE	KENDA AV 29X1.95/2.10 AV:33mm
TAPE	NYLON 29X20
FREEWHEEL	CASSTTE INDEX 12PCS 12S 11-50T
FRONT HUB	WZ-282 F:3/8X32HX100X112mm
REAR HUB	WZ-282 R:3/8X32HX135X152mm
LEFT SHIFT LEVER	N/A
RIGHT SHIFT LEVER	SHIMANO SL-M6100 12S
FRONT DER.	N/A
REAR DER.	SHIMANO RD-M6100 12S
SHIFT CABLE	SP R:1300mm+220mm
WATER BOTTLE BOLTS	M5X15mm 2PCS
REFLECTOR	H85 H05 H86
TOOLS	Included



Element



All measurements provided in cm unless otherwise noted.

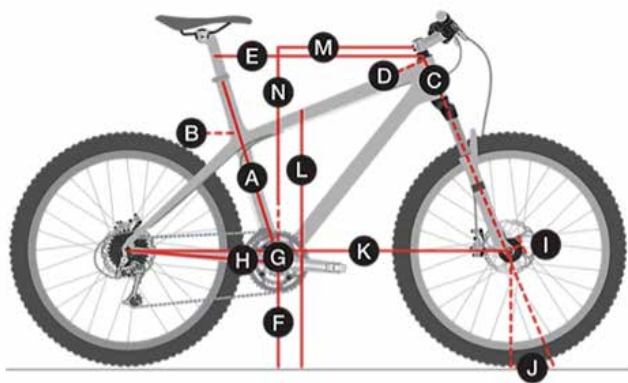

Frame size number	18.5	19.5	21.5
Frame size letter	ML	L	XL
Wheel size	29"	29"	29"
A – Seat tube	44.4	47.0	52.1
Effective seat tube angle	73.0°	73.0°	73.0°
C – Head tube length	9.0	10.0	12.0
D – Head angle	69.5°	69.5°	69.5°
E – Effective top tube	61.8	63.8	65.9
F – Bottom bracket height	31.0	31.0	31.0
G – Bottom bracket drop	5.8	5.8	5.8
H – Chainstay length	43.8	43.8	43.8
I – Offset	4.2	4.2	4.2
J – Trail	9.3	9.3	9.3
K – Wheelbase	111.6	113.7	115.9
L – Standover	75.8	75.7	76.9
M – Frame reach	43.4	45.1	46.6
N – Frame stack	60.2	61.1	63.0